

SECTION A-A  
SCALE 1 : 1

1.128 [28.65]  
REFERENCE

5.872 [149.15]  
REFERENCE

7.000 [177.80]  
REFERENCE

4.250 [107.95]  
1

.440 [11.18]  
1

.811  
.688 MIN.  
[20.60]  
[17.48]

.568 [14.43]  
TYPICAL

1.816  
1.625 MIN.  
[46.13]  
[41.28]  
REFERENCE


.400 MAX.  
.345 MIN.  
[10.16]  
[8.76]  
REFERENCE

1.578 [40.08]  
1  
REFERENCE  
TYPICAL

SECTION C-C  
SCALE 1 : 1

NOTES:

- 1. ACCURACY OF INDICATED DIMENSION IS CRITICAL TO THE FUNCTION OF THE LOCK.
- 2. ALL DIMENSIONS ARE AFTER WELD.
- 3. ALL FASTENERS FOR HARDWARE SHOULD PASS THROUGH TWO PVC WALLS OF A SINGLE WALL WITH AN INTERIOR METAL INSERT.
- 4. SEE AMESBURYTRUTH HARDWARE CATALOG FOR FURTHER INFORMATION ON APPLICATION OF MAXIM LOCK COMPONENTS.

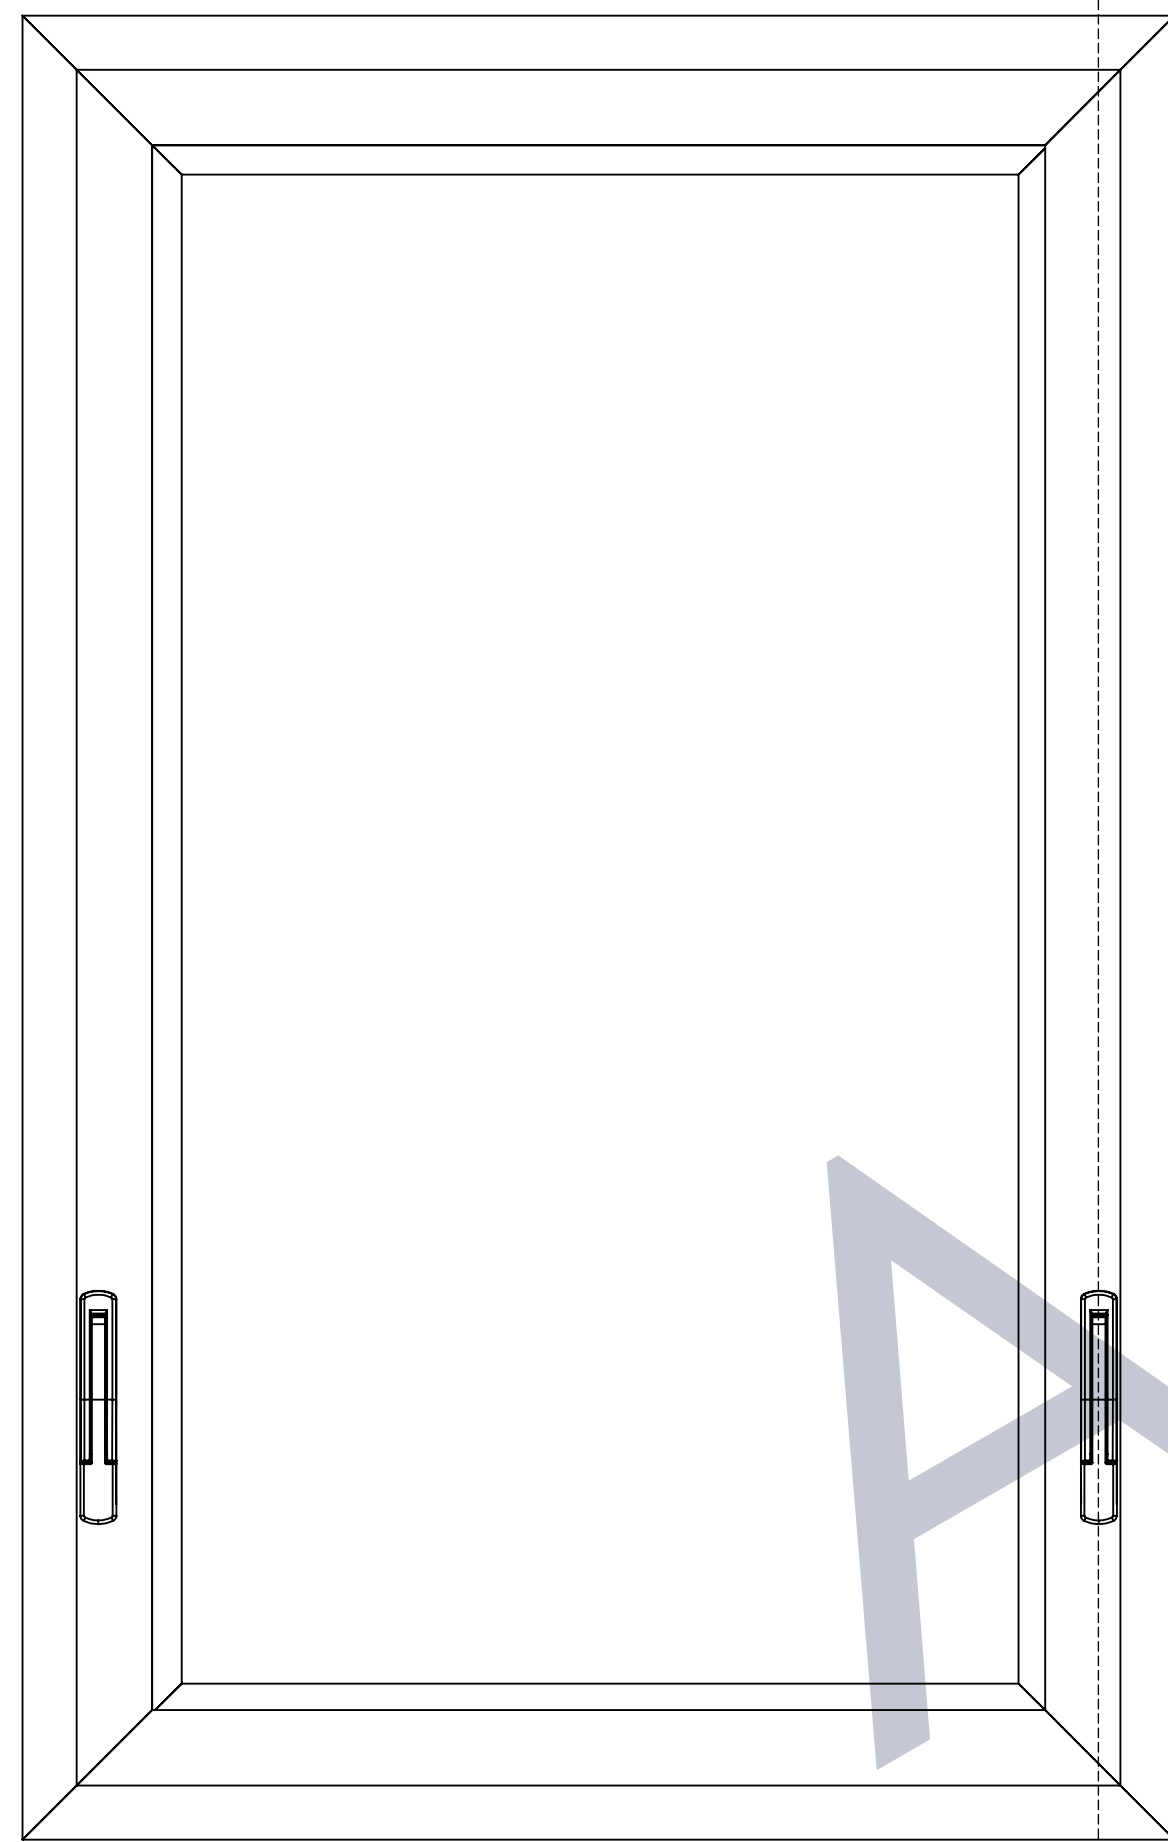

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	24.40.XX.001	LOCK, MAXIM LP SINGLE POINT	2
2	33823	SUPPORT PLATE	2
3	31802	KEEPER, 5/32 OFS W/TAB SS	2
4	19298	SCREW 10-24 X 9/16 F PH PH MS YZ	8
5	19291	SCREW 10X3/4 PH PH SMS SS18-8	6