
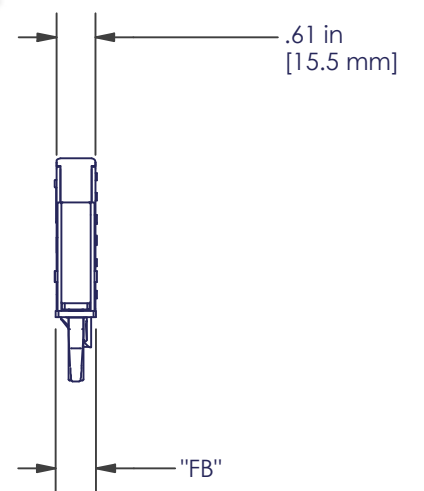


"BS" BACKSET	"FB" FACEBAR WIDTH	"OL" OVERALL LENGTH		RHINO HOOK LOCKPOINT LOCATION		PART NUMBER
		MIN	MAX	"LH"	"UH"	
35mm (1.378")	16mm (0.630")	69	82.5	24.87	14.47	56358004481
		82	95.5	24.87	27.47	56358004681
		95	108.5	24.87	40.47	56358004881
		108	121.5	24.87	53.47	56358005081
	20mm (0.787")	69	82.5	24.87	14.47	56358204481
		82	95.5	24.87	27.47	56358204681
		95	108.5	24.87	40.47	56358204881
		108	121.5	24.87	53.47	56358205081
45mm (1.772")	16mm (0.630")	69	82.5	24.87	14.47	56457004481
		82	95.5	24.87	27.47	56457004681
		95	108.5	24.87	40.47	56457004881
		108	121.5	24.87	53.47	56457005081
	20mm (0.787")	69	82.5	24.87	14.47	56457204481
		82	95.5	24.87	27.47	56457204681
		95	108.5	24.87	40.47	56457204881
		108	121.5	24.87	53.47	56457205081
60mm (2.362")	16mm (0.630")	69	82.5	24.87	14.47	56607004481
		82	95.5	24.87	27.47	56607004681
		95	108.5	24.87	40.47	56607004881
		108	121.5	24.87	53.47	56607005081
	20mm (0.787")	69	82.5	24.87	14.47	56607204481
		82	95.5	24.87	27.47	56607204681
		95	108.5	24.87	40.47	56607204881
		108	121.5	24.87	53.47	56607205081

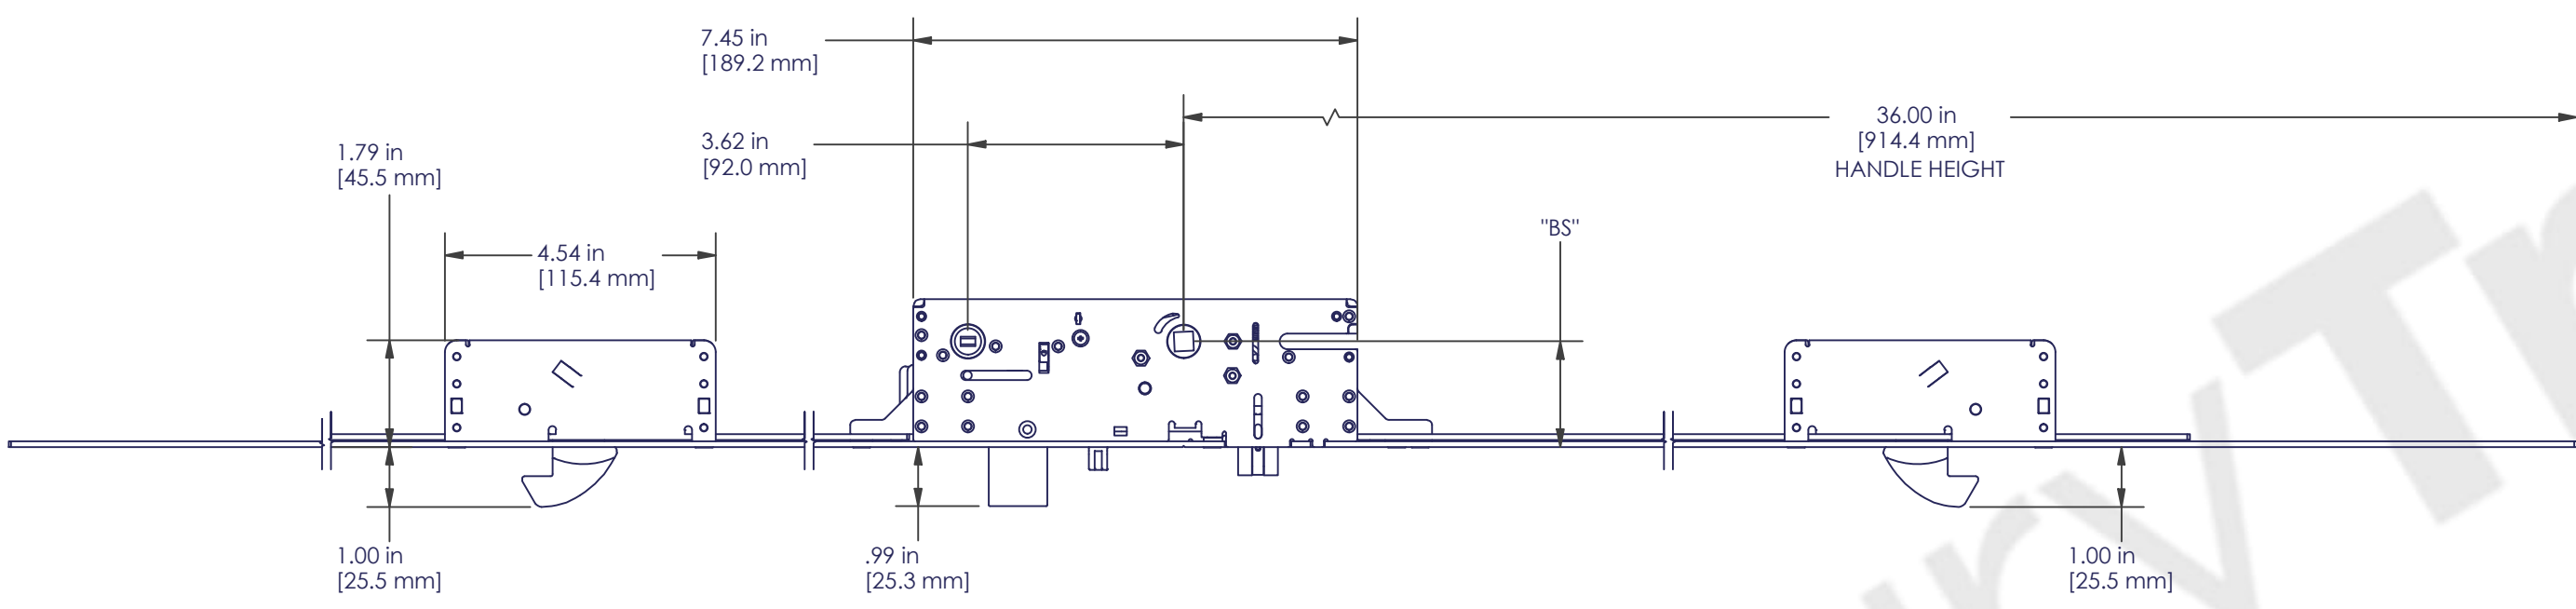

Engineered Solutions. Trusted Results.

THE INFORMATION CONTAINED IN THIS
DRAWING IS CONFIDENTIAL AND PROPRIETARY.
THIS DRAWING IS NOT TO BE COPIED OR
REPRODUCED IN WHOLE OR IN PART WITHOUT
EXPRESS WRITTEN PERMISSION.

INTERPRET PER:
ASME Y14.5M-2009

UNITS: INCH

THIRD ANGLE
PROJECTION

DRAWING TITLE:
XCORE 3 POINT 2 SHOOTS

SCALE: 1 / 2
PART #:

SHEET 1 OF 1
GENERAL MARKET SELECTION

CUSTOMER PAGE