


Engineered Solutions. Trusted Results.

REACH: 0.375"

PP3366 - (AP-475)

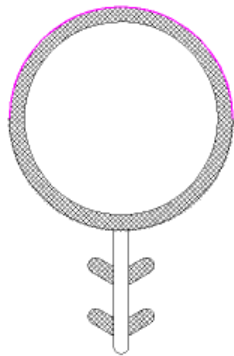

Aptus seals are extruded TPEs. This material combines the flexibility of a thermoplastic with the functional performance and properties of a conventional thermoset rubber. Dual durometer kerf barb allows for easy insertion. Slip coat on the top of the bulb decreases operating force in sliding and sweeping applications. Compression seal for mounting distances from .187" to .337" with a bulb diameter of .375".

Flexible bulb acts as a mechanical seal with little resistance. Conforms to the shape of the sealing surface better than a rigid part.

Product Highlights

- Designed for a 0.080" kerf
- TPE weatherseal - with low friction Pro-Slip
- Flexible bulb acts as a mechanical seal with little resistance
- Conforms to the shape of the sealing surface better than a rigid part

Available Colors

Blacks



Black

Browns



Bronze

Tans



Beige

Whites



White